



L7.0*W1.5*H1.4mm



MAIN FEATURE

- 32.768KHz • Plastic Package • High Precision & Reliability


APPLICATION

- Notebook computer, TV, STB, LCDM and more

STANDARD SPECIFICATION

Parameter	Value			Unit	Condition
	Min.	Type	Max.		
Frequency Range	-	32.768	-	KHz	
Oscillation Mode	AT Fund.				
Frequency Tolerance	-	±20		ppm	@25 °C or Specify
Operating Temperature Range	-40	-	+85	°C	CL: 7.0pF, 9.0pF or Specify
Storage Temperature Range	-55	-	+125	°C	
Load Capacitance (CL)	-	12.5	-	pF	
Frequency/Temp Coefficient	0.028	0.034	0.04	ppm/C ²	
Turnover Temp	+20	+25	+30	°C	
Equivalent Series Resistance	-	-	65	Kohm	
Drive Level	-	-	1.0	µW	
Shunt Capacitance	0.9	1.8	2.0	pF	
Dynamic Capacitance	-	1.9	-	Ff	
Quality Factor	-	60000	-		
Capacitance Ratio	-	450	-		
Aging per year	-	±3	-	ppm/year	
Insulation Resistance	500	-	-	Mohm	@ 100Vdc ± 15V

DIMENSION (+/-0.1mm)

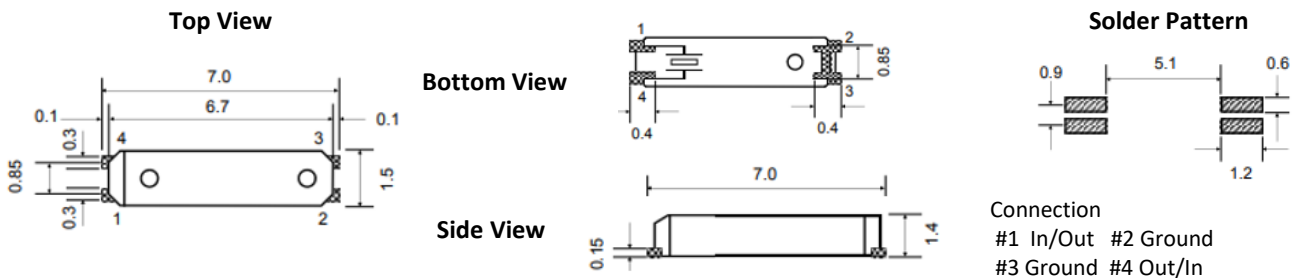

PART NUMBER GUIDE

Example: TGS CCMN 32K768A20-12.5-40-65 TLH

Part Number and Part Code Structure

TGS	CCMN	32K768	A	20	-12.5	-40	-65	T	LH	XX
1	2	3	4	5	6	7	8	9	10	11

- 1) TGS: Company Code
- 2) CCMN: KHz Plastic SMD Crystals, 2 pads L7.0*W1.5*H1.4mm
- 3) 32K768: Frequency Range 32.7680000KHz
- 4) A: Oscillation Mode, AT Fund.
- 5) 20: Frequency tolerance: +/-20ppm or specify
- 6) 12.5: Load Capacitance, 12.5pF; 9: 9.0pF or Specify
- 7) 40: Operating Temp. Range -40°C ~+85°C,
- 8) 65: Equivalent Series Resistance, 65 Kohm Max.
- 9) T: Package in Tape/Reel, 9000pcs/Reel
- 10) LH: RoHS//RoHS II compliant

11) XX: Internal Control Code- 2 letter or digits ; Blank: N/A

TGS Crystals Ltd. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.